




## 20-100: STANDARD PATTERN BRONZE WATER GAUGES

### OVERVIEW

Use for all types of liquid level verification; available with 3/8" or 1/2" NPT male pipe connections. Aluminum or plastic composition hand wheels; EPDM gauge glass gaskets standard. Other glass gaskets available. Automatic ball checks help prevent the loss of fluids should the glass be broken.

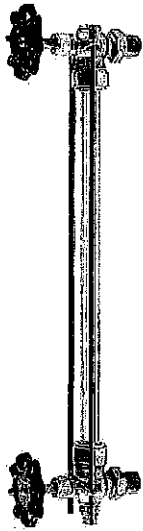

### FEATURES

- Ball checks standard on 20-150 models
- Equipped with two copper guard rods
- Standard 1/4" needle drain valve in lower arm
- Rated: 125 psig @ 350°F, 300 psig @ 100°F (See note!)
- CRN Registered OF6616.5C

| Part Number | Pipe Size (in.) | Glass O.D. & Length | Wt./100 (lbs.) | Wheel Type  |
|-------------|-----------------|---------------------|----------------|-------------|
| 20-101      | 3/8             | 5/8 x 10            | 145            | ALUMINUM    |
| 20-102      | 3/8             | 5/8 x 10            | 145            | COMPOSITION |
| 20-104      | 1/2             | 5/8 x 12            | 160            | ALUMINUM    |
| 20-105      | 1/2             | 5/8 x 12            | 160            | COMPOSITION |
| 20-150*     | 1/2             | 5/8 x 12            | 160            | ALUMINUM    |
| 20-151*     | 1/2             | 5/8 x 12            | 160            | COMPOSITION |

Note: Service ratings are subject to pressure/temperature ratings of gauge glass and glass gaskets.  
\* Automatic ball valves

### OPTIONS

| Suffix Number | Specification  |
|---------------|--|
| -00           | Standard gauge w/ standard glass & rod                   |
| -01           | Top only   |
| -02           | Bottom only  |
| -03           | Standard gauge less glass & rod                          |
| -10           | For special gauges w/ non-standard glass and rod lengths |